



# Murano Glass Chandeliers


Original Made in Italy Murano Glass Chandeliers  
<http://www.murano-glass-chandeliers.com>



## FIXED LUMINAIRE

Rated power: **Max 40W**  
 Rated voltage: **230V**  
 Frequency: **50Hz**

Type lamp: **E14**  
 Protection degree: **IP20**  
 Safety class protection: **Classe I**



### WARNING:

- 1- Read these instructions carefully before beginning to fit the lighting unit.
- 2- To preserve with care this sheet for every ulterior consultation.
- 3- This electrical unit must be installed by qualified personnel.
- 4- The following the assembly technical designs are generic (do not represent the specific article).


The manufacturer is not responsible if the fixtures are not installed in according to these instructions and to local safety standards.



### **For glass component**

### Assembly legend:

1. Upward glass leaver with rings at the bottom end to allow the glass to hang straight from the metal plate
2. Flower (same as 1.)
3. Downward leaver (same as 1.)
4. Arm (same as 11.)
5. Glass shade in which must be inserted the socket
6. Metal plate with hole where must be inserted the arms, the downward and upward leaves and the flowers
7. Aluminum cover for the metal plate
8. Kasher to block the metal plate
9. Glass bottom bowl
10. Glass ball
11. Glass finial

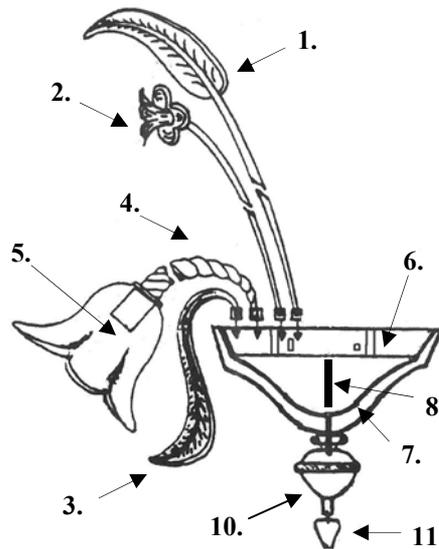


### Assembly connector instructions:

- a) Predispose two holes in the wall, to a distance of 48 mm. Fix founds in metal of the luminaire with the lives in equipment;
- b) Insert and lock the EARTH cable in the clip marked with the earth symbol  $\oplus$ ;
- c) Insert and lock the LINE cable in the clip marked with the line symbol "L";
- d) Insert and lock the NEUTRAL cable in the clip marked with the neutral symbol "N";
- e) Execute the assembly like described in the "Assembly legend".

### Maintenance instruction:

**WARNING: THE LAMP IS VERY HOT, DON'T TOUCH TILL WHEN IT'S COLD**  
 For lamp substitution:


- a) Disconnect main power;
- b) Turn the lamp and take one with the same technical characteristics;
- c) Connect main power and turn on the switch for power on the luminaire;

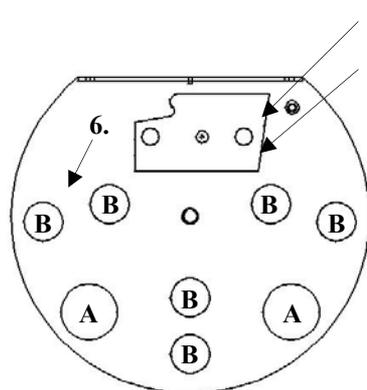

Connection arm 1  
 Connection arm 2

Insert the wires of lampholder to male faston marked with label (L) e (N)

- A) Holes where must be inserted the arms, locked by screws.
- B) Holes where must be inserted decorative components (1, 2, 3)

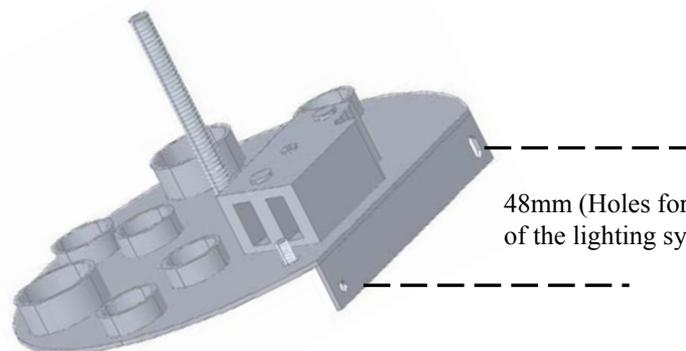

48mm (Holes for wall implantation of the lighting system apparatus).